




**DRACO**




<b>DRAWWORKS:</b>	IDM Equipment 1500HP powered by two, 800HP DC traction motors.
<b>ENGINES:</b>	Three (3) Cummins KTA50 diesel engines each rated at 1470HP
<b>GENERATOR SETS:</b>	Engines Unitized with AVK 1100KW generators supplying power to SCR. 12,000 GAL Fuel Tank
<b>MAST:</b>	IDM 136' telescoping mast with 750,000# hookload. Accommodates 350 Ton Top Drive
<b>SUB STRUCTURE:</b>	IDM 22' hydraulically telescoping substructure rated at 735,000# rotary load with 400,000# simultaneous setback. Rig floor and substructure use integrated drainage system.
<b>ROTARY:</b>	Emsco Type 37½ Rotary independently driven by one 800HP Traction motor.
<b>BOP:</b>	One (1) 13-5/8" 10M Shaffer Type Double Ram BOP One (1) 13-5/8" 10M Shaffer Type Single Ram BOP One (1) 13-5/8" 5M Shaffer Type annular One (1) Koomey 6 station accumulator, API 16E. A 10M flexible choke line and 4' X 4" 10M choke manifold.
<b>MUD PUMPS:</b>	Two (2) F-1600 triplex mud pumps each pump is equipped DC traction motors rated at 1600HP
<b>MUD SYSTEM</b>	848 Barrels Total Active Capacity. Two Covered 424 Barrel Tanks with round bottoms and electric agitators for optimum mixing/blending and ease of clean out. Each tank contains two 5 X 6 X 75HP centrifugal pumps. Hopper is remote for ease of use with bulk tanks. Three Brandt King Cobra Shakers, Brandt DG-10 degasser and Brandt 16 Cone desilter are all unitized on a hydraulically raised mud processing skid. A separate skid incorporates one 106 barrel trip tank with 2X3X25HP centrifugal pump.
<b>TOP DRIVE:</b>	Canrig 350 Ton AC (with "Rocket" Capability)
<b>OVERHEAD STRING:</b>	One (1) 400 ton, six sheave block, with a 12 line string up of 1-3/8"
<b>DRILLER CONTROLS:</b>	Varco Electronic Driller and Block Control System enable near steady state WOB while drilling. Block speed controls minimize swab and surge pressures and increase tripping efficiency. Drawworks speed is joystick controlled with touch screen and manual control of EDrill and SCR
<b>DRILL PIPE:</b>	10,500' of 5" drill pipe of sufficient grade and weight to provide 100# margin over pull.
<b>DRILL COLLARS:</b>	3-8" 21-6 ½" drill collars.
<b>AUXILIARY EQUIPMENT:</b>	Mathey wireline unit with 25,000' of .092 wireline Motorized drill line spool Toolpusher and crew quarters Meeting and Change House Combo with A/C Hydraulic Pipe and Kelly Spinner Hot Water Power Washer 0-7 degree drift indicator Varco Electronic Drilling Recorder



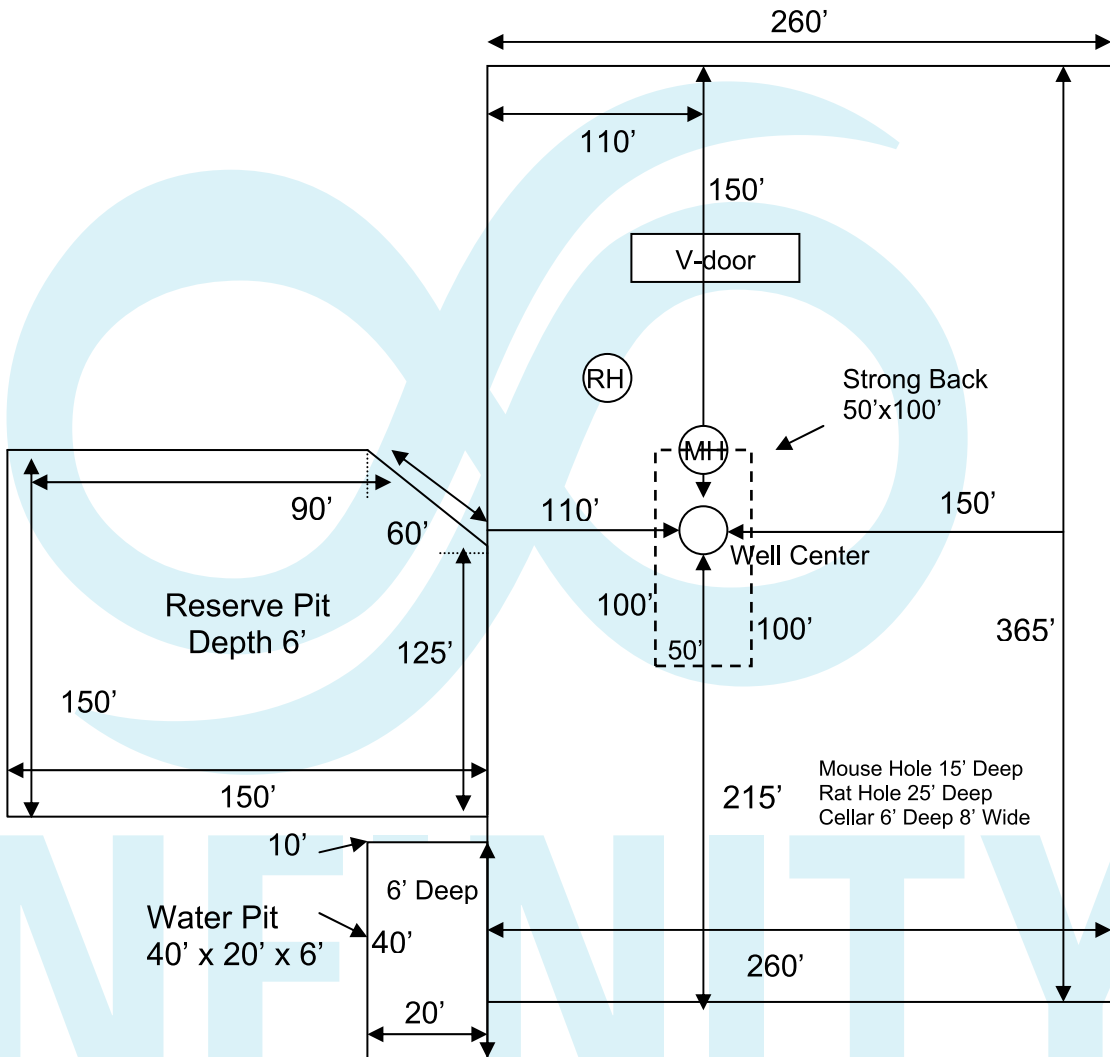

## LOCATION PLAT WITH STRONG-BACK

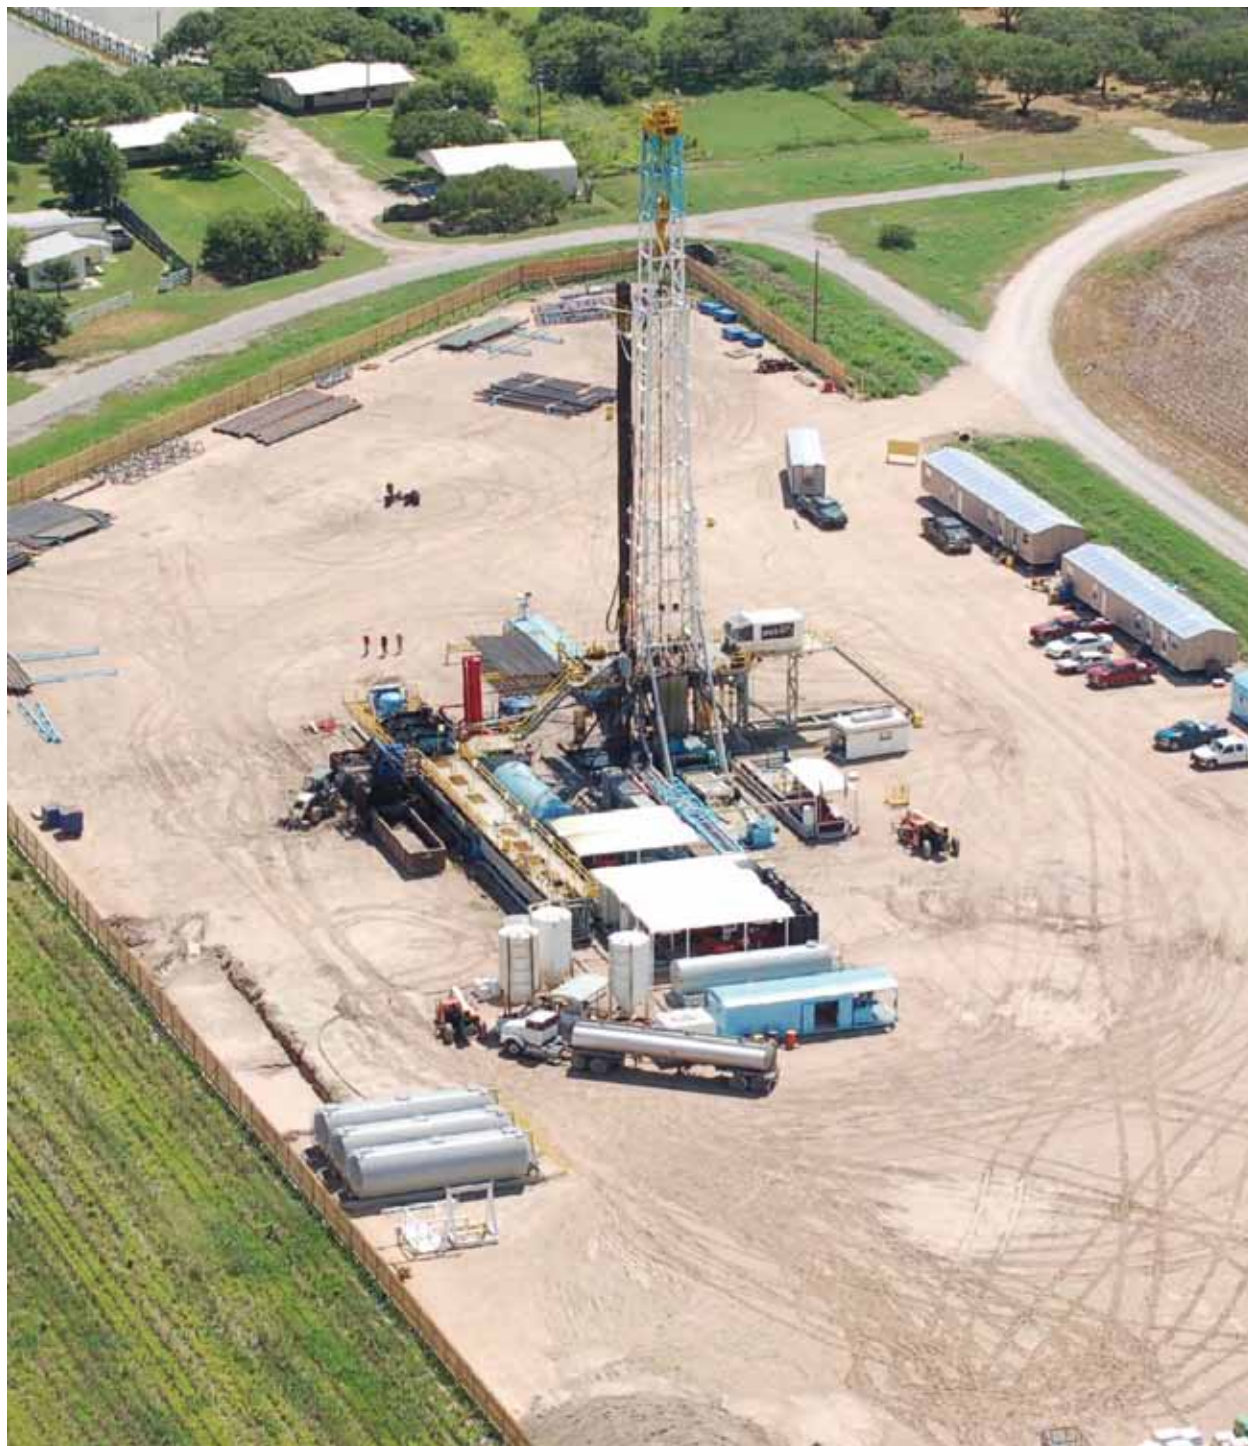

For more information - [oriondrilling.com](http://oriondrilling.com)

**ORION**<sup>®</sup>  
DRILLING COMPANY